


Instructions for Sensor Cable Models SC-12, SC-24, SC-36

- 1 or 2 lengths of Sensor Cable can attach to any 1998 Water Alert detector by using an **SC-KIT**. If two lengths are being used, the Water Alert will be located in between the two pieces of Sensor Cable. Lay first piece of Sensor Cable in desired location and Connect Water Alert (A-B), then connect (C-D) and lay second piece (if two pieces are used). Should only one Sensor Cable be attached to a Water Alert the second Water Alert connector (C) will not be used and will be available for future Sensor Cable if needed.
2. Run any wires (Power / Signal) to Water Alert Detectors as instructed in Water Alert instructions.
3. Test Water Alert per Water Alert instructions. To test Sensor Cable simply press firmly on test button E , Water Alert will activate. Regular testing of both the Water Alert and Sensor Cable is recommended every month to insure proper operation.
4. After complete system is operating properly, install Sensor Cable hold down clips.
5. If a leak is detected, Water Alert will activate. Locate activating Water Alert and disconnect A-B. If Water Alert stops activating, the leak is along cable A's length. If the Water Alert remains activating, the leak is along cable D's length.

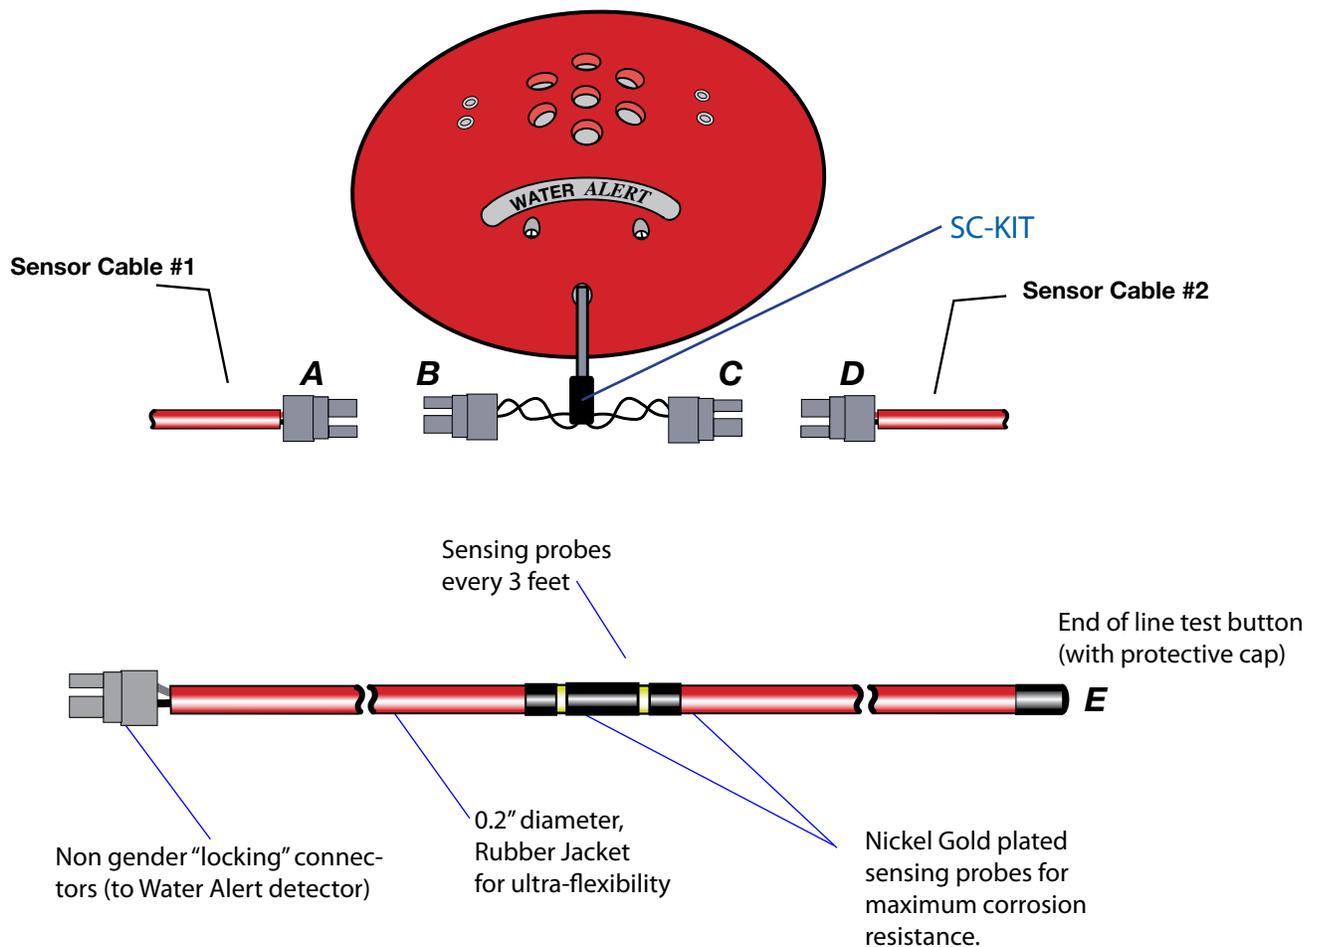

Dorlen Products
 6615 West Layton Avenue, Milwaukee, WI. 53220
 Phone: 414-282-4840 Fax: 414-282-5670 E-Mail: Dorlen@execpc.com
www.wateralert.com